



**HP HOTWATER SKID**


**DYNAMIC TYPE**

# HP HOTWATER SKID | DYNAMIC TYPE

## DESCRIPTION

Stryvo Dynamic HP unit is a High Pressure, High Temperature washer for use in heavy duty applications. Dimensioned to handle the most difficult tasks. Delivers stabil working pressure independent of one or more users. It is designed for:

- Reliability
- Maintenance Friendly
- Easy to operate

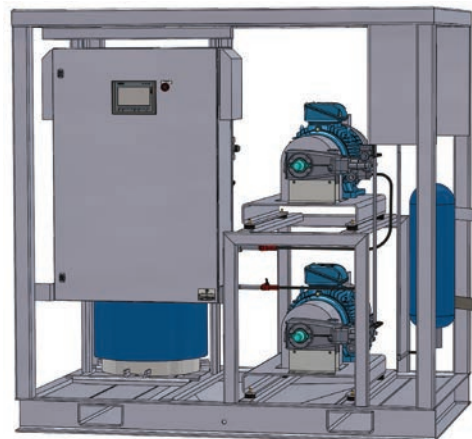

## Size and weight

2000x1400x2000mm (LxDxH)

1280 kg

## Capacity

Pumps: 2 x 20L/min (also single flow for maintenance)

70°C

## Technical data

Framework	316 L
Tank	316 L
Pumps	Brass
Fork Lift Pockets	316 L, According to DNV 2.7-1
Tubing /Fitting	316 ss
Design Temp	100°C
Operating Temperature	70°C
Design Pressure	207 Bar
Operating Pressure	150 Bar
Tank	300 L
Heater	1 x 15 Kw
Power Supply	3 x 440V, 60 hz
Pumps	Cat Pumps 2x15 Kw

## User Equipment

Kärcher user equipment or others

Chemicals

Soap mode / Washing mode

Guns

Lanses

Nozzles

Hose Length

## Options

Norsok Z 015 Certificate

Lifting certification DNV 2.7-1

Enclosure

Heating and Insulation

Noice protection

Heat tracing of pipes

Ex

Capacity

User Equipment

## After Market

Maintenance plan

Service agreements

Inspection